










EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Plugs

VQ 30

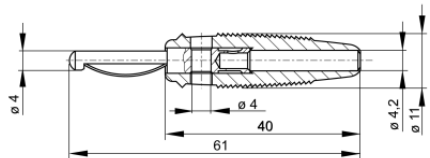

Product	VQ 30
description	Fully mating connector, shatter-proof, flexible insulated sleeve with transverse hole. The tapering sleeve end also serves as kinking protection for the lead. Solder connection up to maximum cable cross-section of 2.5 mm ² . Nickel-plated brass contact material.
operating instruction	BA409
article-no. / *colour	9300611xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> <div style="text-align: center;">  02 blue </div> <div style="text-align: center;">  03 yellow </div> <div style="text-align: center;">  04 green </div> <div style="text-align: center;">  07 white </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; margin-top: 5px;">Ni</div>
drawing	
technical data	
connection	solder connection
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	30 A
material plug	brass, nickel plated
housing material	PVC-P
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +70 °C
standard	IEC 61010

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ without rated measurement category, for other circuits that are not directly connected to mains

stand: 06.05.2019