




**EN:** This Datasheet is presented by the manufacturer.


Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

ISS.	AMEND	DATE
1	WAS ON FC68147	15/06/15

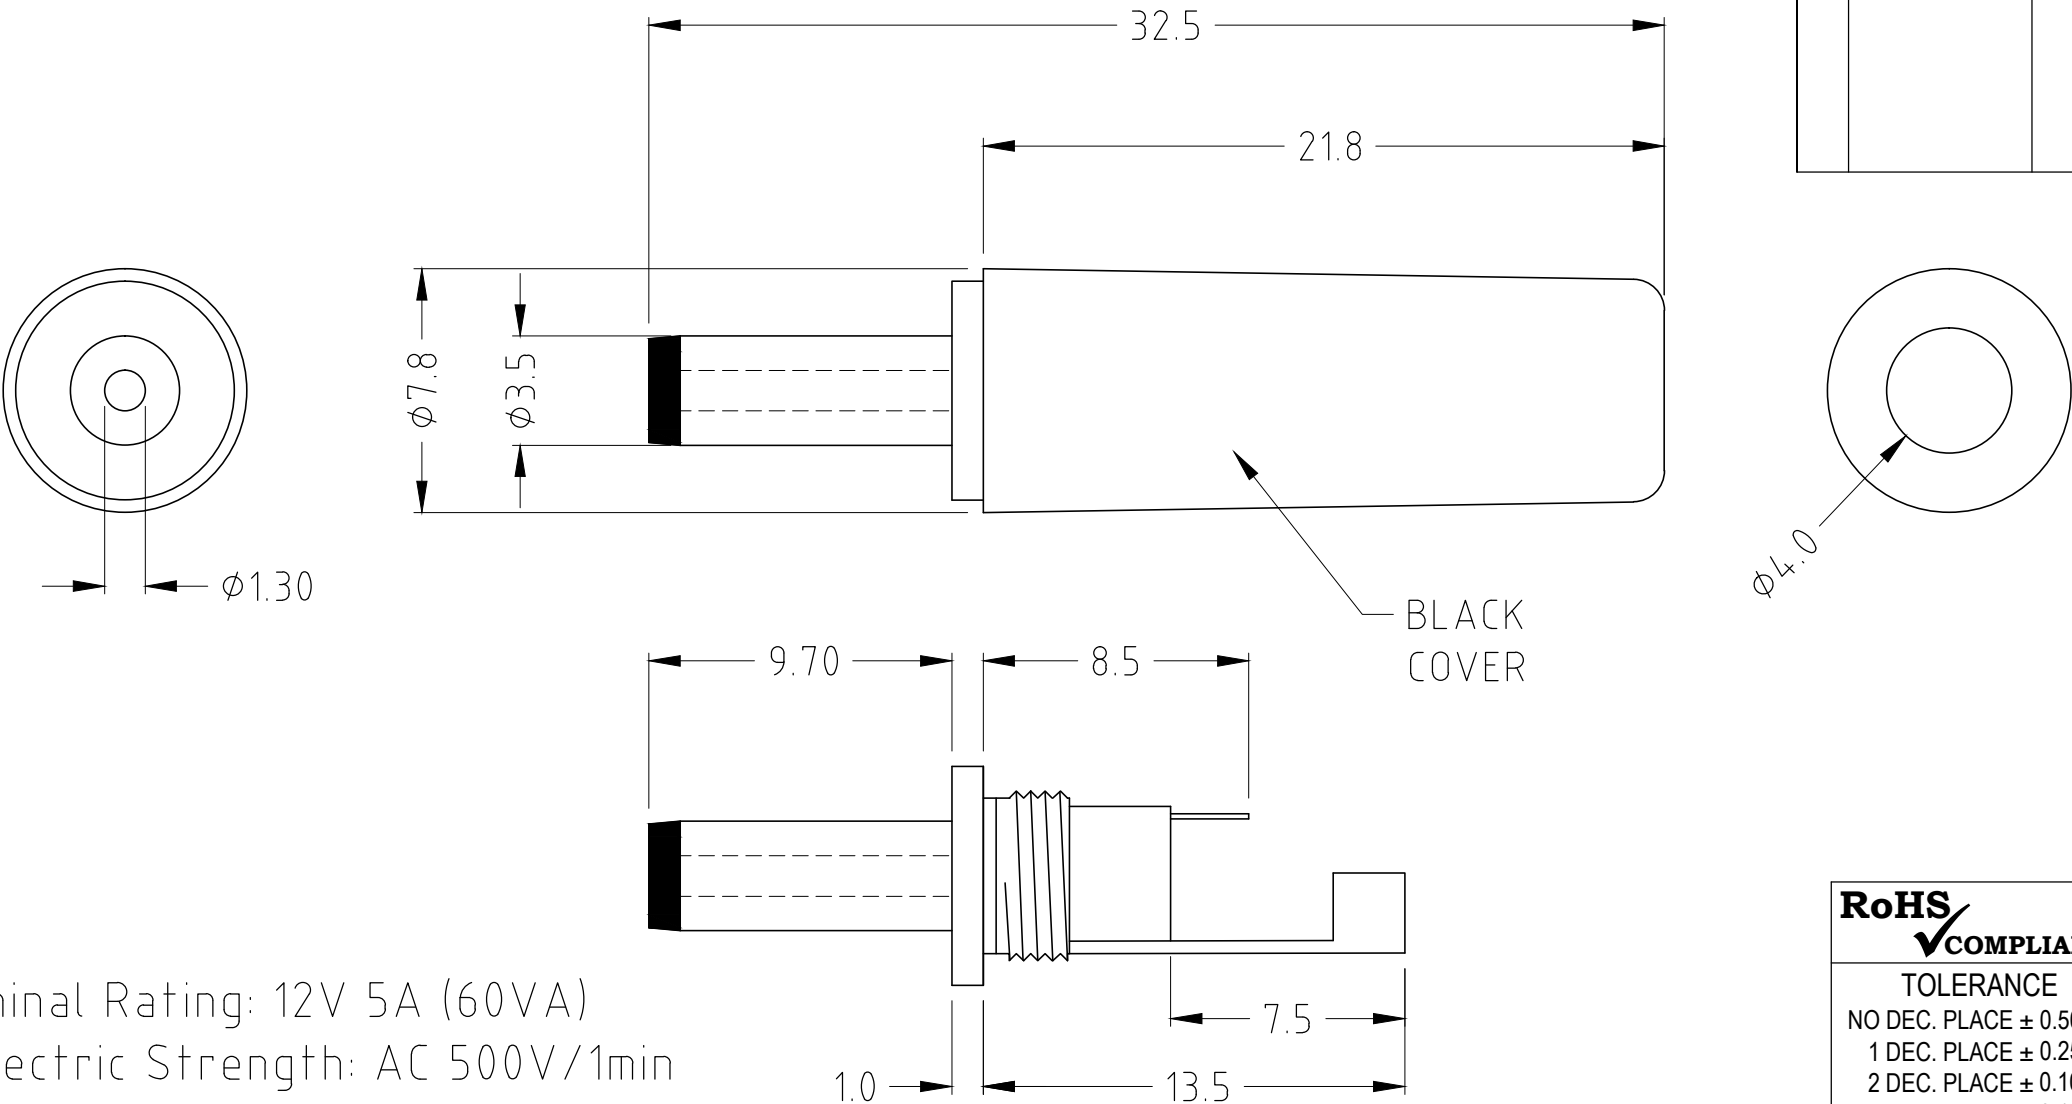

Nominal Rating: 12V 5A (60VA)  
Dielectric Strength: AC 500V/1min  
Insulation Resistance: DC 500V/100M $\Omega$

<b>RoHS</b> COMPLIANT
<b>TOLERANCE</b> NO DEC. PLACE $\pm 0.50$ 1 DEC. PLACE $\pm 0.25$ 2 DEC. PLACE $\pm 0.10$ HOLE $\phi \pm 0.10$ ANGLES $\pm 1/2^\circ$ UNLESS OTHERWISE STATED
DO NOT SCALE

<b>Cliff Electronic Components Ltd.</b> 76 Holmethorpe Avenue, Holmethorpe Industrial Estate, Redhill, Surrey, RH1 2PF, England, UK Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk	DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.		3rd ANGLE PROJECTION: 	DO NOT SCALE		
	MATERIAL: ABS / POM / BRASS		TITLE: DC CONNECTOR DCP3 Ø1.30 (FLANGED)			
	FINISH: AS MOULDED / Ni PLATED					
THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 2015	DRAWN: T.J.O.		APPROVED: D.P.J.		DRWG. No. <b>FA67555</b>	FORM: A4DRWGH