



EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

Upgrade


YL

Lead type, High Capacitance & High Ripple Current Series

S
Solvent Proof

- High ripple current compared with YG series
- High temperature range, for 125°C use
- Complied to the RoHS directive
- AEC-Q200 compliant : Please contact us for more details.




YG $\Rightarrow$ **YL**
High ripple



Item	Characteristics					
Operating temperature range	-55 ~ +125°C					
Leakage current max.	I = 0.01CV or 3μA whichever is greater (after 2 minutes)					
Capacitance tolerance	±20% at 120Hz, 20°C					
Dissipation factor max. (at 120Hz, 20°C)	WV	16	25	35	50	63
	tanδ	0.16	0.14	0.12	0.1	0.08
Low temperature characteristics (Impedance ratio at 100kHz)	Z (-25°C) / Z (+20°C) ≤ 1.5 Z (-55°C) / Z (+20°C) ≤ 2.0					
Load life	After an application of DC bias voltage plus the rated AC ripple current for 4000 hours at 125°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.					
	Capacitance change		Within ±30% of initial value			
	tanδ		Less than 200% of the specified value			
	ESR		Less than 200% of the specified value			
	Leakage current		Less than specified value			
Shelf life(at 125°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4					

DRAWING

Unit : mm

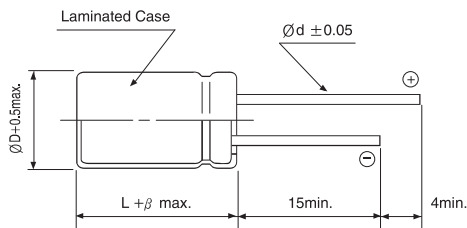

Size	ØD	L	P	Ød	β
6.3×7.5	6.3	7.5	2.5	0.45	1.5
8×9.5	8	9.5	3.5	0.60	1.5
10×9.5	10.0	9.5	5.0	0.60	1.5
10×12	10.0	12.0	5.0	0.60	1.5

PACKING & TAPING (See page 82~84)

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

µF \ WV	16			25			35			50			63		
47										6.3×7.5	40	1500	8×9.5	40	1700
82													10×9.5	30	2000
100							6.3×7.5	35	1700	8×9.5	30	1700	10×12.5	22	3000
150	6.3×7.5	27	1800	6.3×7.5	30	1800	8×9.5	27	2000	10×9.5	25	2000			
220										10×12.5	19	3200			
330				8×9.5	27	2000	10×9.5	20	2800						
390	8×9.5	22	2000				10×12.5	17	3500						
560				10×9.5	20	2800									
680	10×9.5	18	2800	10×12	16	3500									
820	10×12	14	3500												

Ripple current (mA rms) at 125°C, 100kHz
ESR (mΩ) at 20°C, 100kHz
Case size ØD×L(mm)