




EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

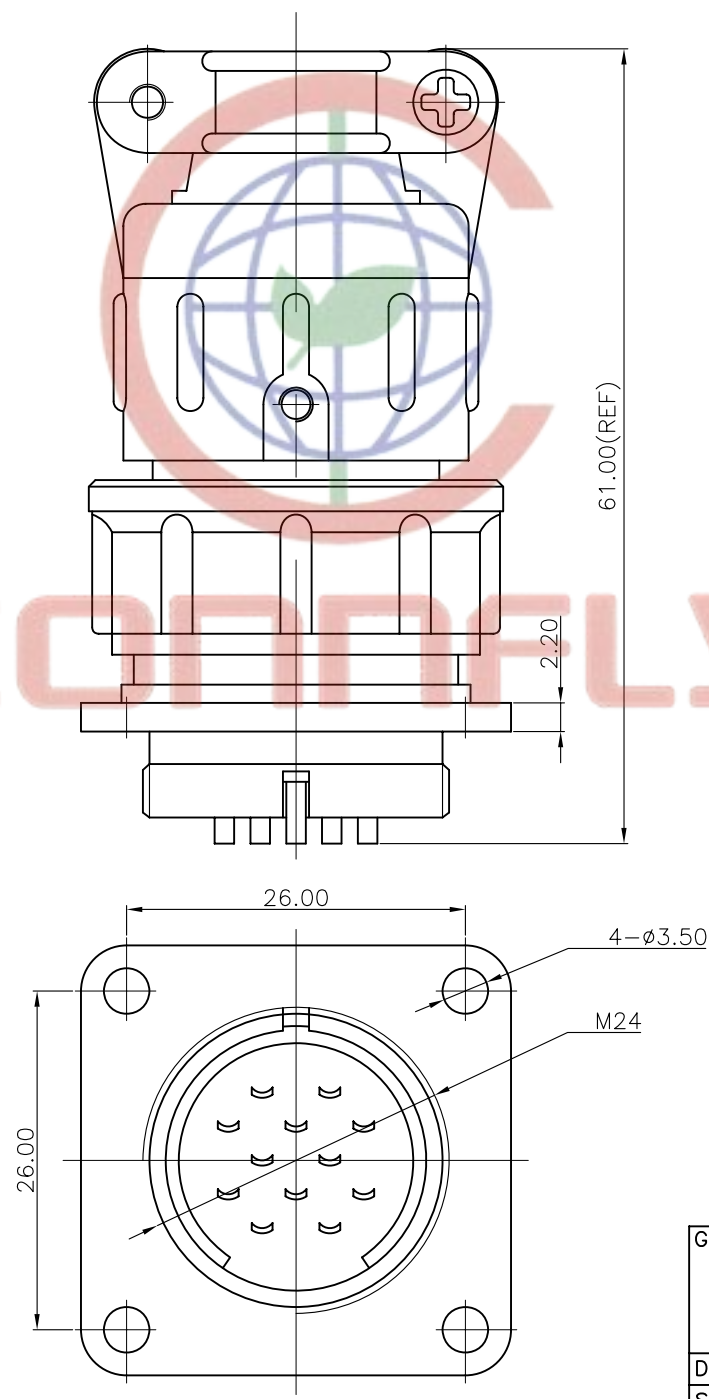

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/17/07'	~	

NOTES:


1.SPECIFICATION

- .CURRENT RATING: 5A Max.
- .DIELECTRIC WITH STANDING VOLTAGE: 500V(AC)
- .CONTACT RESISTANCE: 100mΩ Max.
- .INSULATION RESISTANCE: 1000MΩ(DC)Min.

2.PRODUCT NUMBER CODE:

DS1110-07 - X X X X

- SHELL SURFACE FINISHED
P:SPRAY THE PAINT (GRAY)
- CONTACT PLATING
Y: SILVER
- COLOR OF HOUSING:
L: BLUE
- No. OF CONTACTS
12: 12pin
19: 19pin
26: 26pin

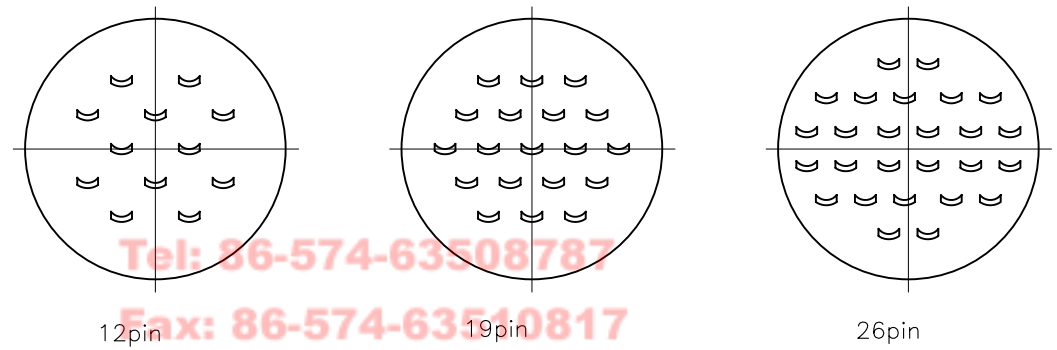

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X. ±0.60		X. ±5°		UNITS	mm	MICRO JACK CONNECTOR	
.X ±0.38		.X ±3°		SHEET SIZE	A4	SERIES	DS1110-07 SERIES
.XX ±0.25		.XX ±2°		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE	CUSTOMER						
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1110-07-XXX						