



EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

USB, Ausführung B-Mini, 5-Polig, SMD

USB, version B-Mini, 5-poles, SMD



Isolierkörper

Nylon PA9T

Kontakte

Phosphorbronze

Durchschlagsspannung

500V AC

Isolationswiderstand

1000M Ω min.

Strombelastbarkeit

1.5A

Insulator

Nylon PA9T

Contacts

Phosphorbronze

Withstanding voltage



500V AC

Insulation resistance

1000M Ω min.

Rated current

1.5A

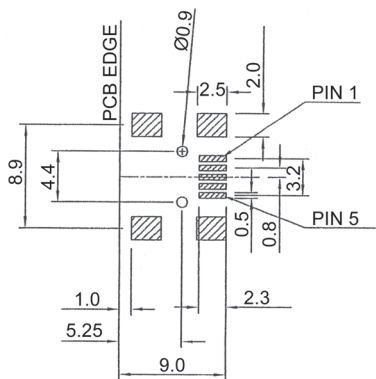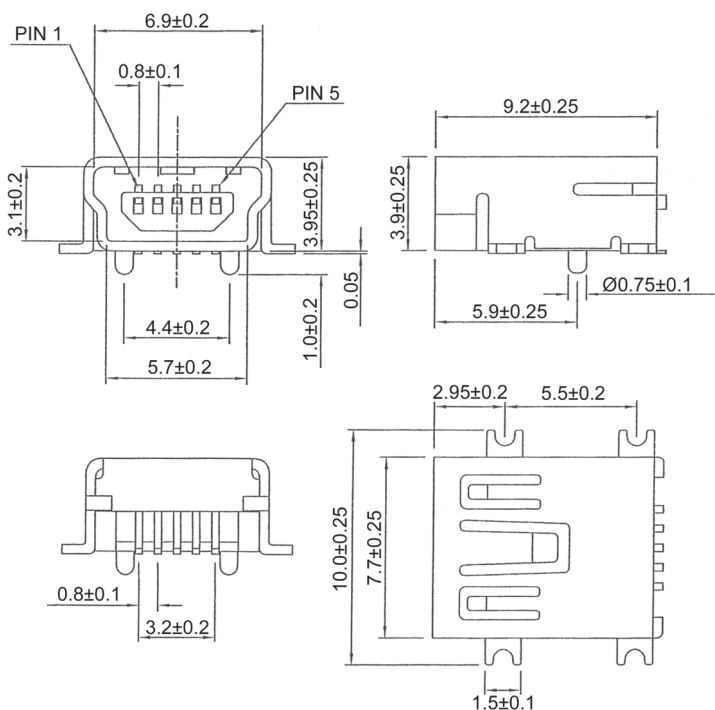

Bestellcode : **A - USBB - M5/SMD**
Ordercode :

D-Sub / Hoods
Centronics

Multiflex

Modular

USB

Switches

Powercords
Powersockets

MiniDIN

DIN4161x
Hardmetric

Sockets + Strips
Jumper